


# DC Axial Fan

## 60 x 60 x 10 mm 4 Pin

60x60x10mm DC Axial Fan P/Q Curves (At rated speed)

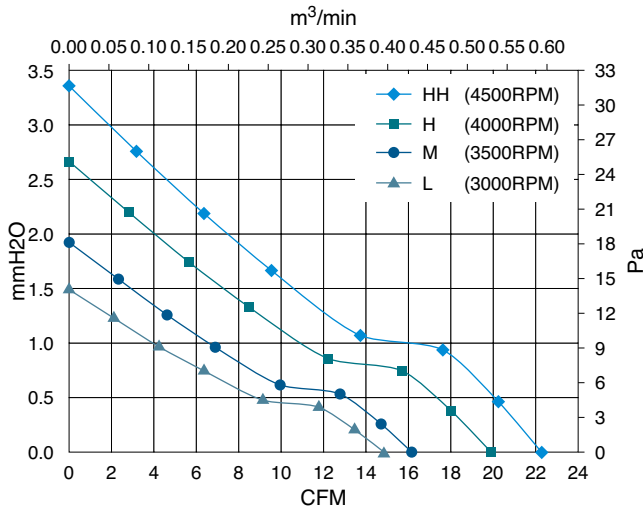

- Bearing Type
  - Ball bearing
  - Sleeve bearing
- Electrical Function
  - Frequency Generator Output Signal
  - RD (Lock Detection) Output Signal
  - PWM(Pulse Width Modulation)
- Material
  - Impeller: Plastic (PBT 30%GF)
  - Frame: Plastic (PBT 30%GF)
- Lead wires
  - UL1007 28AWG or Equivalent
  - Black Wire Negative (-)
  - Red or Yellow Wire Positive (+)
  - Green Wire Signal (FG)
  - Blue Wire (PWM)
- Weight: 24.8g (0.87 oz)

MODEL	Operating Voltage Range	Rated Voltage	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
Part No.	VDC	VDC	Amp	Watts	R.P.M	m <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	Pa	dB(A)
B/S0601012HHP-4M	10.8V ~13.8V	12	0.20	2.4	4500±10%	0.63	22.25	3.35	32.85	32.0
B/S0601012HP-4M	10.8V ~13.8V	12	0.18	2.2	4000±10%	0.56	19.84	2.67	26.18	28.7
B/S0601012MP-4M	10.8V ~13.8V	12	0.15	1.8	3500±10%	0.46	16.14	1.94	19.02	24.7
B/S0601012LP-4M	10.8V ~13.8V	12	0.10	1.2	3000±10%	0.42	14.85	1.49	14.61	21.2

\* Function type is optional.  
 \* The max. air flow and speed are measured in free air; max. air pressure is measured at close to zero air flow.  
 \* Noise is measured in anechoic chamber in free air, one meter from intake side.  
 \* All readings are typical values at rated voltage.  
 \* Specifications are subject to change without notice.