



Model No.

X0752512Y 75x75x25mm

Frame and Impeller Material :
Plastic (UL 94V-0)

Bearing system :
Ball Bearing (B)
Sleeve Bearing (S)

Lead Wires :
UL 1007 AWG 28 or equivalent.
Red:+, Black:-


Model No. :
X0752512Y

X=Bearing system, can be S or B type.
Y=Fan speed, can be L, M, H or HH.


Net Weight :
60.2g



OUTLINE

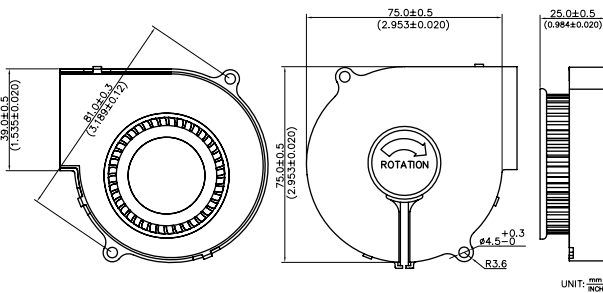

CHARACTERISTIC CURVES

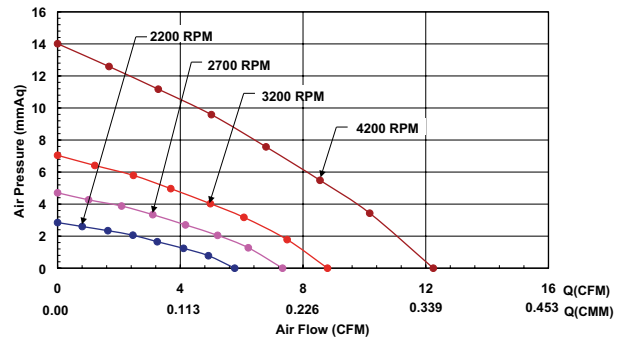

SPECIFICATIONS

| Item | Rated Voltage | Operating Voltage Range | Rated Current | Starting Voltage | Rated Input Power | Max Air Flow | | Max Air Pressure | | Noise | Speed |
|------------|-----------------|-------------------------|---------------|------------------|-------------------|--------------|-------|------------------|------|-------|---------|
| | V _{DC} | V _{DC} | A | V _{DC} | W | CMM | CFM | mmAq | inAq | dBA | RPM±10% |
| X0752512L | 12 | 6~13.8 | 0.13 | 6 | 1.56 | 0.16 | 5.77 | 2.84 | 0.11 | 28.5 | 2200 |
| X0752512M | 12 | 6~13.8 | 0.25 | 6 | 3.00 | 0.21 | 7.33 | 4.7 | 0.19 | 33.0 | 2700 |
| X0752512H | 12 | 6~13.8 | 0.33 | 6 | 3.96 | 0.25 | 8.80 | 7.05 | 0.30 | 37.5 | 3200 |
| X0752512HH | 12 | 6~13.8 | 0.40 | 6 | 4.80 | 0.35 | 12.24 | 14.01 | 0.55 | 42.3 | 4200 |