



Model No.

X0602012Y 60x60x20mm

Frame and Impeller Material :
Plastic (UL 94V-O)

Bearing system :
Ball Bearing (B)
Sleeve Bearing (S)



Lead Wires :
UL 1007 AWG 28 or equivalent.
Red:+, Black:-

Model No. :


X0602012Y

X=Bearing system, can be B or S type..
Y=Fan speed, can be L, M, H or HH.


Net Weight :
52g



OUTLINE

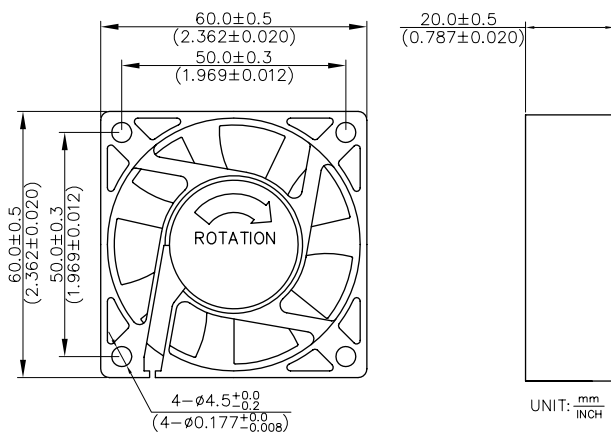

CHARACTERISTIC CURVES

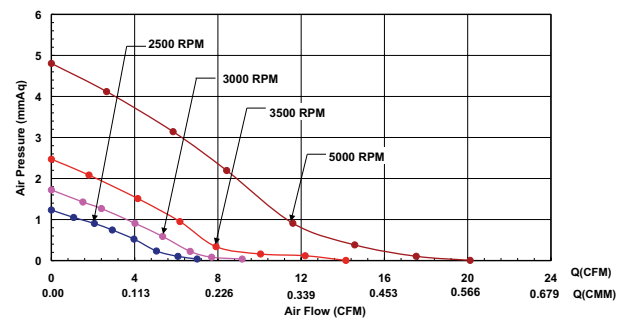

SPECIFICATIONS

Item Model No.	Operating Voltage Range	Rated Voltage	Rated Current	Rated Input Power	Speed	Max Air Flow		Max Air Pressure		Noise
	V _{DC}	V	Amp	Watt	R.P.M	m ³ /min	CFM	mmH ₂ O	inH ₂ O	dBA
B/S0602012L	6~13.8	12	0.08	0.10	2500	0.20	7.00	1.23	0.05	20.8
B/S0602012M	6~13.8	12	0.10	1.20	3000	0.26	9.17	1.72	0.07	23.6
B/S0602012H	6~13.8	12	0.15	1.80	3500	0.40	14.15	2.47	0.10	27.1
B/S0602012HH	6~13.8	12	0.20	2.40	5000	0.57	20.12	4.81	0.19	36.3